


# Eonis 21" (MDRC-2321)

21" clinical display for hospital-wide viewing of clinical data and images

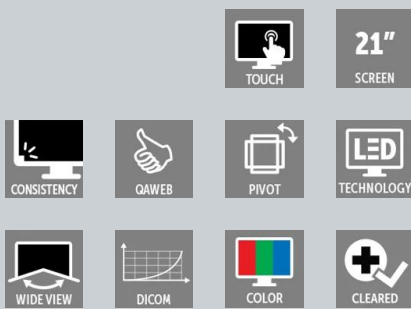

- **21" display for reviewing clinical images**
- **With front sensor for consistent images**
- **With remote QA management tools**
- **Different versions available**

This 21" Eonis display has been built with healthcare specialists in mind. It combines consistent, high image quality and an attractive, versatile design with networked quality assurance.

## High image quality

The high-quality Eonis display presents sharp, bright images with high contrast and a wide viewing angle. Eonis uses the latest in advancements in LED backlight technology, ensuring a higher brightness that can be maintained over a longer period of time.

The display's unique front consistency sensor ensures fast power-up and continuous luminance stability. The image consistency makes collaboration between specialists easier. They can discuss images with colleagues at multiple locations, knowing that everyone is seeing identical images.

## Centralized quality assurance

Eonis comes complete with Barco's cloud-based QAWeb Enterprise software, an online service for automated calibration, Quality Assurance and asset management. Praised in hospitals around the world, QAWeb Enterprise allows healthcare IT and PACS administrators to centrally and remotely manage image quality across the healthcare organization, at the click of a button.

## Smart design, fit for purpose

Barco's Eonis display is safe to use in a clinical environment. The multiple mounting options and connections add to the smart design. The display is as high in brightness as it is low in power consumption. The lightweight form factor and packaging help reduce the environmental footprint of this product.

## Models

- MDRC-2321 (Option SNIB): standard brightness, touchscreen, internal power supply, black
- MDRC-2321 (Option STIB): standard brightness, touchscreen, internal power supply, black

Please consult your Barco representative or distributor in your country or territory to confirm availability. A reference to any product or service on this site does not imply that such product is or will be available in your location.

**Product specifications****EONIS 21" (MDRC-2321)**

General specifications	
Screen technology	LCD
Active screen size (diagonal)	541.0 mm (21.3")
Active screen size (H x V)	432.0 mm x 324.0 mm (17.0 x 12.8")
Aspect ratio (H:V)	4:3
Resolution	2MP (1600 x 1200 pixels)
Pixel pitch	0.270 mm
Color imaging	Yes
Gray imaging	Yes
Bit depth	30 bit
Viewing angle (H, V)	178°
Ambient light presets	Yes, reading room selection
Front sensor	Yes, Front Consistency Sensor
Maximum luminance (panel typical)	Standard brightness versions (MDRC-2321 (option Sxxx)): 500 cd/m <sup>2</sup> High brightness versions (MDRC-2321 (option Hxxx)): 1000 cd/m <sup>2</sup>
DICOM calibrated luminance	Standard brightness versions (MDRC-2321 (option Sxxx)): 250 cd/m <sup>2</sup> High brightness versions (MDRC-2321 (option Hxxx)): 400 cd/m <sup>2</sup>
Contrast ratio (panel typical)	1800:1
Response time ((Tr + Tf)/2) (typical)	8 ms
Housing color	RAL 9004
Video input signals	1 x DP, 1 x DVI-I
USB ports	1x USB 2.0 upstream (endpoint) 2x USB 2.0 downstream
Power rating	100-240 VAC, 50/60 Hz, 0.9-0.5 A
Power consumption	Standard brightness versions (MDRC-2321 option Sxxx): 20 W High brightness versions (MDRC-2321 option Hxxx): 25 W < 0.5 W (hibernate) < 0.5 W (standby)
Dimensions with stand (W x H x D)	Portrait: 374.5 x 506.6~583.3 x 201.3 mm Landscape: 477.0 x 411.5~529.6 x 201.3 mm
Dimensions w/o stand (W x H x D)	Portrait: 477.0 x 374.5 x 70.4 mm Landscape: 374.5 x 477.0 x 70.4 mm
Dimensions packaged (W x H x D)	660 x 513 x 230 mm
Net weight with stand	MDRC-2321 (option SNIB and HNIB): 5.8 kg MDRC-2321 (option STIB and HTIB): 6.8 kg
Net weight w/o stand	MDRC-2321 (option SNIB and HNIB): 3.6 kg MDRC-2321 (option STIB and HTIB): 4.6 kg
Net weight packaged	MDRC-2321 (option SNIB and HNIB): 8.4 kg (without optional accessories) MDRC-2321 (option STIB and HTIB): 9.4 kg (without optional accessories)
Tilt	-5° to +22°
Pivot	0° to 90°
Height adjustment range	110 mm
Mounting standard	VESA (100 mm)
Screen protection	MDRC-2321 (option STIB and HTIB): PCAP touchscreen MDRC-2321 (option SNIB and HNIB): None

**Product specifications****EONIS 21" (MDRC-2321)**

<b>Recommended modalities</b>	All digital images, except digital mammography.
<b>Certifications</b>	FDA class I, 510(k) exempt CE (Medical Device Class I) CCC (China), KC (Korea), BIS (India)  Safety specific: IEC 60950-1:2005 + A1:2009 +A2:2013 EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 IEC 60601-1:2005 + CORR. 1:2006 + CORR. 2:2007 + AM1:12 EN 60601-1:2006 + A1:2013 + A12:2014 ANSI/AAMI ES 60601-1:2005 + R1:2012 CAN/CSA C22.2 No. 60601-1:2014 EMI specific: IEC 60601-1-2: 2014 (ed4) EN 60601-1-2:2015 (ed4) FCC part 15 Class B ICES-003 Level B VCCI (Japan) Environmental: China Energy Label, EU RoHS, China RoHS, REACH, Canada Health, WEEE, Packaging Directive
<b>Supplied accessories</b>	1x DisplayPort video cable 1x USB cable 1x printed User Guide (in English, other languages can be found on the documentation disc) 1x documentation disc 1x system sheet Mains cables
<b>Optional accessories</b>	None
<b>QA software</b>	QAWeb
<b>Warranty</b>	3 years
<b>Operating temperature</b>	0 °C to 40 °C (15 °C to 35 °C within specs)
<b>Storage temperature</b>	-20 °C to 60 °C
<b>Operating humidity</b>	8% to 80% (non-condensing)
<b>Storage humidity</b>	5% to 90% (non-condensing)
<b>Operating pressure</b>	70 kPa minimum
<b>Storage pressure</b>	50 to 106 kPa

**Last updated: 22 Sep 2023**

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest specifications.